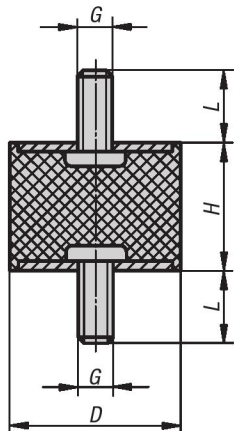


Rubber-metal buffers

style A

METRIC
Parts

KIPP Rubber-metal buffer, style A, metric

Item No.	D	G	L	H	Spring stiffness N/mm	Load N
K0566.00800855	8	M3	6	8	24	31
K0566.01001055	10	M4	10	10	35	32
K0566.01001555	10	M4	10	15	50	50
K0566.01500855	15	M4	10	8	130	104
K0566.01501055	15	M4	10	10	122	122
K0566.01501555	15	M4	10	15	59	88
K0566.02000855	20	M6	18	8	725	580
K0566.02001055	20	M6	18	10	300	300
K0566.02001555	20	M6	18	15	200	300
K0566.02002055	20	M6	18	20	133	332
K0566.02002555	20	M6	18	25	90	270
K0566.02501055	25	M6	18	10	800	800
K0566.02501555	25	M6	18	15	294	441
K0566.02502055	25	M6	18	20	200	500
K0566.02502555	25	M6	18	25	94	282
K0566.02503055	25	M6	18	30	70	280
K0566.03001555	30	M8	23	15	587	880
K0566.03002055	30	M8	23	20	318	795
K0566.03002555	30	M8	23	25	183	549
K0566.03003055	30	M8	23	30	150	600
K0566.03004055	30	M8	23	40	77	385
K0566.04001555	40	M8	23	15	1250	1875
K0566.04002055	40	M8	23	20	565	1412
K0566.04003055	40	M8	23	30	300	1200
K0566.04004055	40	M8	23	40	189	945
K0566.05002055	50	M10	28	20	1300	3250
K0566.05002555	50	M10	28	25	667	2000
K0566.05003055	50	M10	28	30	500	2000
K0566.05004055	50	M10	28	40	300	1500
K0566.05005055	50	M10	28	50	193	1153
K0566.06004055	60	M10	28	40	377	1885
K0566.07004555	70	M10	28	45	410	2255
K0566.07502555	75	M12	37	25	1655	4965
K0566.07504055	75	M12	37	40	717	3585
K0566.07505055	75	M12	37	50	470	2820
K0566.07505555	75	M12	37	55	405	2835

Material:

Metal parts, galvanized steel, class 5.6;
elastomer, natural rubber, medium hardness, 55°
Shore A

Type:

Steel galvanized.

Part Number Example:

K0566.00800855

Note:

The rubber-metal buffers are widely-used construction devices for elastic bearings. They are used, among other things, as bearings for assemblies, motors, compressors, pumps and testing machines.

Temperature range:

-30 °C up to +80 °C.