


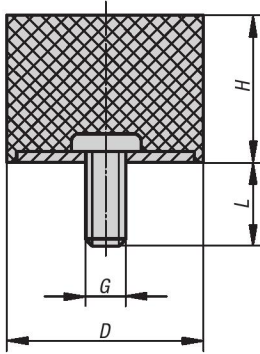

Rubber-metal buffer

style D

METRIC
Parts

KIPP Rubber-metal buffer, style D, metric

Item No.	D	H	G	L	Spring stiffness N/mm	Load N
K0571.00800855	8	8	M3	6	40	40
K0571.01001055	10	10	M4	10	35	35
K0571.01001555	10	15	M4	10	26	40
K0571.01500655	15	6	M4	10	175	88
K0571.01500855	15	8	M4	10	187	187
K0571.01501055	15	10	M4	10	100	100
K0571.01501555	15	15	M4	10	50	100
K0571.02000555	20	5	M6	18	135	95
K0571.02000855	20	8	M6	18	250	250
K0571.02001055	20	10	M6	18	240	240
K0571.02001555	20	15	M6	18	110	220
K0571.02002055	20	20	M6	18	75	225
K0571.02002555	20	25	M6	18	65	227,5
K0571.02500855	25	8	M6	18	850	850
K0571.02501055	25	10	M6	18	400	400
K0571.02501555	25	15	M6	18	210	420
K0571.02502055	25	20	M6	18	140	420
K0571.02502555	25	25	M6	18	100	350
K0571.02503055	25	30	M6	18	79	316
K0571.03001555	30	15	M8	23	270	540
K0571.03002055	30	20	M8	23	238	714
K0571.03002555	30	25	M8	23	153	535,5
K0571.03003055	30	30	M8	23	127	508
K0571.03004055	30	40	M8	23	88	528
K0571.04001555	40	15	M8	23	710	1420
K0571.04002055	40	20	M8	23	365	1095
K0571.04003055	40	30	M8	23	205	820
K0571.04004055	40	40	M8	23	143	858
K0571.05002055	50	20	M10	28	646	1938
K0571.05003055	50	30	M10	28	354	1416
K0571.05004055	50	40	M10	28	230	1380
K0571.05005055	50	50	M10	28	160	1280
K0571.06004055	60	40	M10	28	317	1902
K0571.07002555	70	25	M10	28	980	3430
K0571.07004555	70	45	M10	28	438	3066
K0571.07502555	75	25	M12	37	1318	4613
K0571.07504055	75	40	M12	37	643	3858
K0571.07505055	75	50	M12	37	472	3776
K0571.07505555	75	55	M12	37	310	3100

Material:

Metal parts, galvanized steel, class 5.6;
elastomer, natural rubber, medium hardness,
55° Shore A

Type:

Steel galvanized.

Part Number Example:

K0571.00800855

Note:

The rubber-metal buffers are used, among other things, for the bearing of aggregates and as a shock stop for the limitation of spring travel in the case of moving masses. Also used with machines that are not firmly anchored to a stand and rest on weak floorings, e.g., office machines.

Temperature range:

-30 °C up to +80 °C.