

Spring Plungers

pin style, slotted, steel

INCH Parts METRIC Parts



Material:


Body in steel quality class 5.8.
Pressure pin in steel.
Spring in spring steel class D.

Type:

Black oxide finish.
Pressure pin hardened.

Part Number Example:

K0313.AG

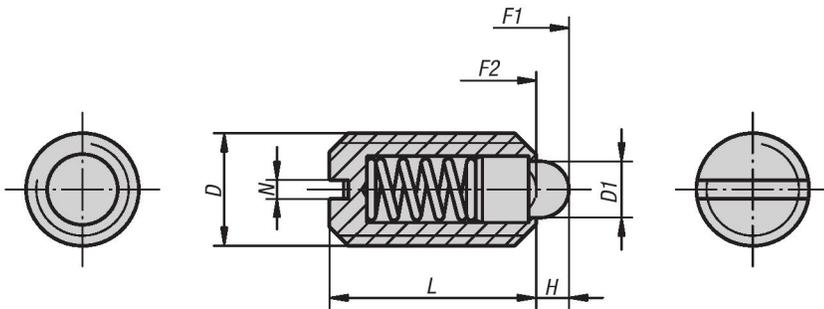

KIPP Spring Plungers, pin style, slotted, steel, standard end pressure, inch

Item No.	D	D1	L	H	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0313.AG	8-36	1.8	9	1.5	0.6	6	20
K0313.AE	8-32	1.8	9	1.5	0.6	6	20
K0313.A1	10-32	2.4	12	2	0.8	6	20
K0313.AJ	1/4-28	2.7	14	2	1	7	20
K0313.A2	1/4-20	2.7	14	2	1	7	20
K0313.A3	5/16-18	4	16	2	1.2	15	30
K0313.A4	3/8-16	4.5	19	2.5	1.6	20	35
K0313.A5	1/2-13	6	22	3.5	2	30	55
K0313.A6	5/8-11	8.5	24	4.5	2.5	45	100



Spring Plungers

pin style, slotted, steel

KIPP Spring Plungers, pin style, slotted, steel, light end pressure, inch

Item No.	D	D1	L	H	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0313.1AG	8-36	1.8	9	1.5	0.6	2	7
K0313.1AE	8-32	1.8	9	1.5	0.6	3	10
K0313.1A1	10-32	2.4	12	2	0.8	3	10
K0313.1AJ	1/4-28	2.7	14	2	1	3	9
K0313.1A2	1/4-20	2.7	14	2	1	4	10
K0313.1A3	5/16-18	4	16	2	1.2	7	15
K0313.1A4	3/8-16	4.5	19	2.5	1.6	9	16
K0313.1A5	1/2-13	6	22	3.5	2	14	26
K0313.1A6	5/8-11	8.5	24	4.5	2.5	22	50

KIPP Spring Plungers, pin style, slotted, steel, standard end pressure, metric

Item No.	D	D1	L	H	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0313.04	M4	1,8	9	1,5	0,6	6	20
K0313.05	M5	2,4	12	2	0,8	6	20
K0313.06	M6	2,7	14	2	1	7	20
K0313.08	M8	4	16	2	1,2	15	30
K0313.10	M10	4,5	19	2,5	1,6	20	35
K0313.12	M12	6	22	3,5	2	30	55
K0313.16	M16	8,5	24	4,5	2,5	45	100
K0313.20	M20	10	30	6,5	2,5	60	120

KIPP Spring Plungers, pin style, slotted, steel, light end pressure, metric

Item No.	D	D1	L	H	N	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
K0313.104	M4	1,8	9	1,5	0,6	3	10
K0313.105	M5	2,4	12	2	0,8	3	10
K0313.106	M6	2,7	14	2	1	4	10
K0313.108	M8	4	16	2	1,2	7	15
K0313.110	M10	4,5	19	2,5	1,6	9	16
K0313.112	M12	6	22	3,5	2	14	26
K0313.116	M16	8,5	24	4,5	2,5	22	50
K0313.120	M20	10	30	6,5	2,5	30	60